

Secomore

Always Keep Moving



**LAMINATED
DOORS**

Secomore

Always **Keep Moving**




Secomoré

Always Keep Moving



STANDARD LAMINATED DOOR CONSTRUCTION:

- 1 Tower Bolt
- 2 Frame (Kiln Dried Season Pinewood)
- 3 Filler (Hardwood)
- 4 Lock Rail
- 5 Core
- 6 Toughness of Gurjan
- 7 Decorative Face (Laminate / Veneer / Polished Veneer)

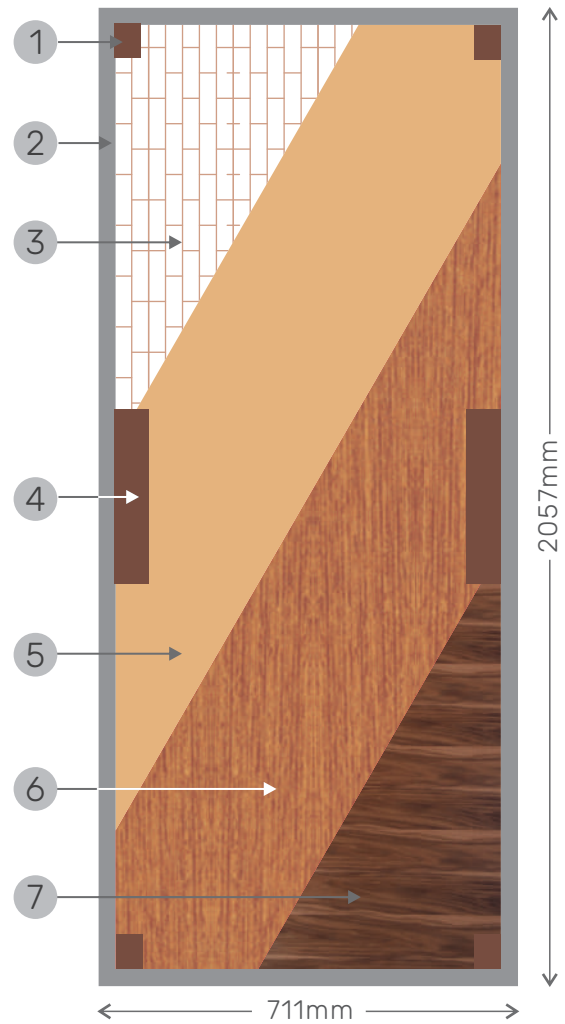

AVAILABLE THICKNESS

- Standard Thickness : 30 mm, 35 mm
- Thickness Available on Laminated : 0.92 mm

TECHNICAL SPECIFICATIONS

FRAME:

- All frames are made of Imported Pinewood - 5 Inch wide frame
- Seasoned Frame
- Frames made from Single Piece wood
- Klin Dried Seasoned Frame

FILLER:

- Hardwood

All wood is fully seasoned through Kiln Chamber to avoid warping & bending

Products are termite and borer resistant, however further care to be taken in case of infestation



LAMINATED DOORS:



CODE NO. 01

Finish: Matt

Category: A



CODE NO. 02

Finish: Matt

Category: A




CODE NO. 03

Finish: Matt

Category: D


Secomore
Always Keep Moving

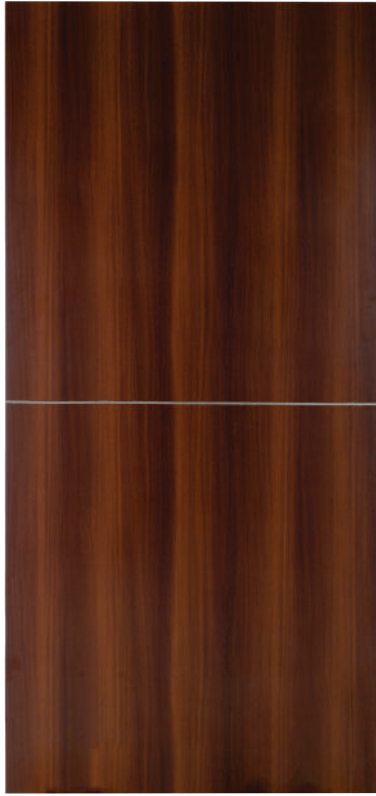

CODE NO. 04

Finish: Matt

Category: C



CODE NO. 05

Finish: Matt

Category: A



CODE NO. 06

Finish: Matt

Category: D


Secomore
Always Keep Moving



CODE NO. 07

Finish: HG

Category: B



CODE NO. 08

Finish: Matt

Category: D



CODE NO. 09

Finish: Matt

Category: C


Secomore
Always Keep Moving



CODE NO. 10

Finish: HG+

Category: B



CODE NO. 11

Finish: Matt

Category: B



CODE NO. 12

Finish: HG

Category: B


Secomore
Always Keep Moving



CODE NO. 13

Finish: HG

Category: B



CODE NO. 14

Finish: HG

Category: B



CODE NO. 15

Finish: HG

Category: B


Secomore
Always **Keep Moving**



CODE NO. 16

Finish: MT

Category: B



CODE NO. 17

Finish: MT

Category: B



CODE NO. 18

Finish: MT

Category: A


Secomore
Always Keep Moving



CODE NO. 19

Finish: MT

Category: C



CODE NO. 20

Finish: MT

Category: C



CODE NO. 21

Finish: MT

Category: D


Secomore
Always Keep Moving



CODE NO. 22

Finish: MT


Category: C



CODE NO. 23

Finish: MT

Category: C

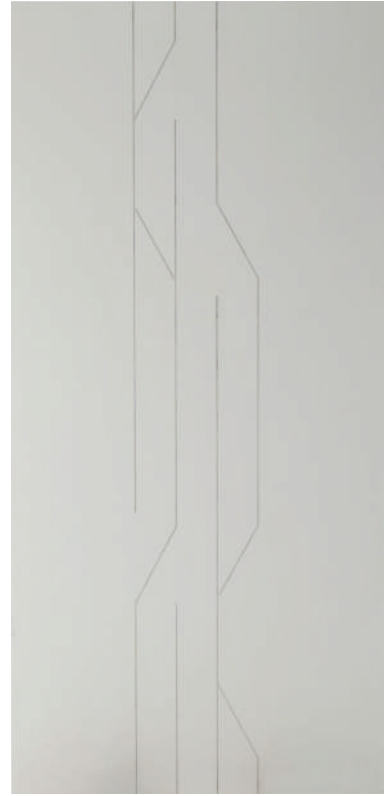

CODE NO. 24

Finish: MT

Category: C


Secomore
Always Keep Moving



CODE NO. 25

Finish: MT

Category: C



CODE NO. 26

Finish: MT

Category: C



CODE NO. 27

Finish: MT

Category: C



Secomore
Always **Keep Moving**



CODE NO. 28

Finish: MT

Category: D

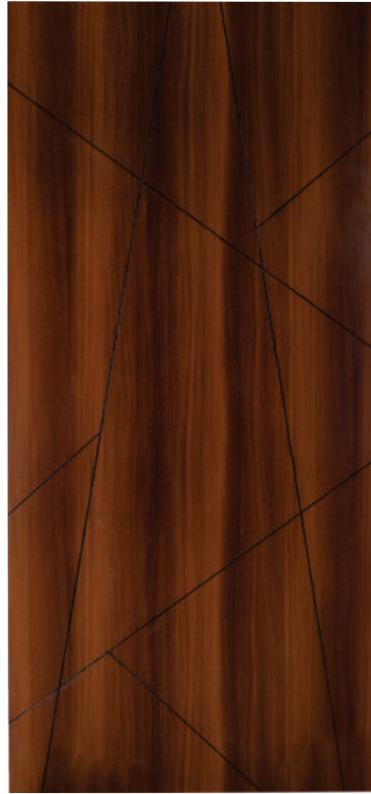

CODE NO. 29

Finish: Matt

Category: C



CODE NO. 30

Finish: Matt

Category: C


Secomore
Always Keep Moving

STANDARD SIZE OF DOORS

WITH 5 INCHES FRAME

Thickness	Height in Inches	Width in Inches
30 MM	81	42
30 MM	81	36
30 MM	81	32
30MM	81	28
35 MM	81	42
35 MM	81	36
35 MM	81	32
35 MM	81	28
35 MM	94	42
35 MM	94	36
35 MM	94	32
35 MM	94	28



FIXING & SETUP GUIDELINE

INSTALLATION GUIDELINES



- Doors can be cut on all the sides up to 12mm per side. Trimming should be done on both sides equally.

- Subsequent to trimming all sides should be primed or sealed with wood sealant and must be applied immediately.

- Bottom of the door must be painted / polished before installation of the door is done.

- Hinges must be aligned before fitting the door, to avoid bending. It is recommended that you fix two hinges in the upper portion on the door with a gap of 6 inches from each other and by leaving a gap of 12 inches from the top, for the first hinges. The rest of the hinges should be placed equal distance in the rest of the door length.

- We will not be held liable for any of the damages due to the wind or any external forces.

- If the doors are trimmed more than 12mm in width or height from any side the manufacturing warranty shall be void and Durian shall not be responsible for the same.

- Bathroom doors must be fitted with teak or hardwood lipping at the bottom to prevent moisture absorption. If not followed manufacturing warranty shall become void and Durian shall not be responsible for the same.

- 3mm space between the frame and door must be provided on all sides of the door shutter. This is to accommodate minor movements of the door frames.



STORAGE GUIDELINES

- Store flat on a level surface in a clean, dry, well ventilated building. Protect from dirt, water and abuse. Allow air circulation. Cover the top door with a moisture barrier.

- Doors should not be subjected to abnormal or sudden variations in heat, dryness or humidity, and should not be exposed to direct sunlight. Recommended humidity and temperature are 25% – 55% RH and 50°F – 90°F (10°C – 32°C).




WARNING

- Distortion Warping, bowing and waviness, can appear as a result of incorrect topcoat (paints or stains), improper finishing techniques and or finishing conditions. These are caused by but are not limited to incorrect topcoat, watered down paints, high humidity environments, excessive application of paints, and doors not being acclimated properly

- Please read and understand the entire procedure before attempting to finish your doors. Be sure to follow the coating manufacturer's warnings and instructions on all product labels. Durian does not warrant any coating unless applied by Durian. Any damage caused by or resulting from the application of a stain or paint will void the door warranty.

- Durian gives warranty only for its product. If it is found that there is a manufacturing defect, Durian shall repair only for its product and will not be responsible for any value addition what so ever.

- The decision of Durian Technical team in determining whether a defect is a manufacturing defect or an application defect will be treated as final.



Secomore

Secomore

Inspired by Nature. Engineered to Endure

Contact Us

Click the link & explore more!



Website



Facebook



Whatsapp

Social Media Platform

Facebook : [FB.com/Secomore](https://www.facebook.com/Secomore)

Instagram: [instagram.com/seco.more](https://www.instagram.com/seco.more)

Welcome to visit Secomore !

Tel: +201128899888

Web: www.Secomore.com

Email: info@secomore.com

Whatsapp: +201128899888

Secomore
Always Keep Moving